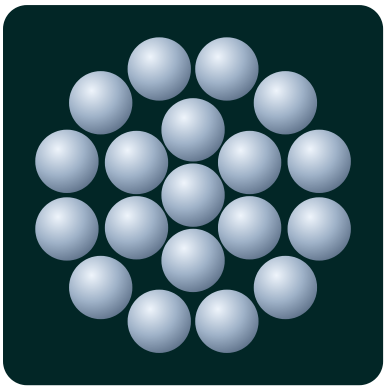


AAAC Conductors

AAAC Panther

19/3.94 Al alloy · bare conductor

Characteristics

Overall diameter	19.70 mm
Approx. weight	639 kg/km
Total Al area	231.7 mm²
Rated strength ≈	69.3 kN
Max DC resistance 20 °C	0.1446 Ω/km
Standard	BS 3242 · NF C34-125 · IEC 61089
Max operating temp.	90 °C

Construction

Component	Material	Construction	Cores	Area / core
AL Alloy Wires	Al alloy 6201	19 × Ø 3.94 mm	1	231.7 mm²

Indicative data calculated from the standard construction. Final values are given in the approved Technical Data Sheet (TDS) for each order. Drum length and marking to customer requirements. Prices on request. Cables are manufactured according to the applicable customer specifications and relevant technical standards. Compliance with specific EN standards is subject to verification and confirmation through the required testing.