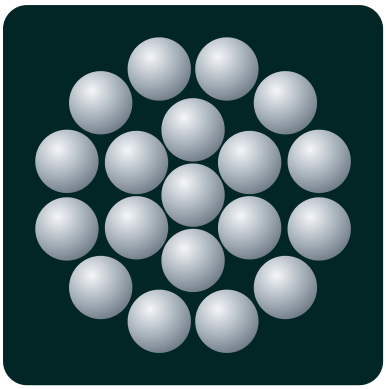


AAC Conductors

AAC Caterpillar

19/3.53 Al · bare conductor

Characteristics

Overall diameter	17.65 mm
Approx. weight	513 kg/km
Total Al area	185.9 mm²
Rated strength ≈	29.1 kN
Max DC resistance 20 °C	0.1550 Ω/km
Standard	BS 215-1
Max operating temp.	90 °C

Construction

Component	Material	Construction	Cores	Area / core
AL Wires	Aluminium 1350	19 × Ø 3.53 mm	1	185.9 mm²

Indicative data calculated from the standard construction. Final values are given in the approved Technical Data Sheet (TDS) for each order. Drum length and marking to customer requirements. Prices on request. Cables are manufactured according to the applicable customer specifications and relevant technical standards. Compliance with specific EN standards is subject to verification and confirmation through the required testing.